


# Netting Specifications for M500BK FR - HTPP Knotless

Style .....	Raschel Knotless Netting
Fiber .....	High Tenacity Polypropylene
Cord Diameter .....	3/32 inch (2.3 mm)
Mesh Size .....	1-3/4 inches (45 mm)
Mesh Break* .....	180 lbf (0.8 kN)
Dynamic Drop** .....	1,050 ft-lb (1,420 N-m)
Weight .....	0.0176 lb/ft <sup>2</sup> (86 g/m <sup>2</sup> )
Melting Point .....	320° F (160° C)
Flame Retardant Test .....	NFPA 701 Method 1 & DIN 4102
UV .....	300 kLy
Color .....	Black

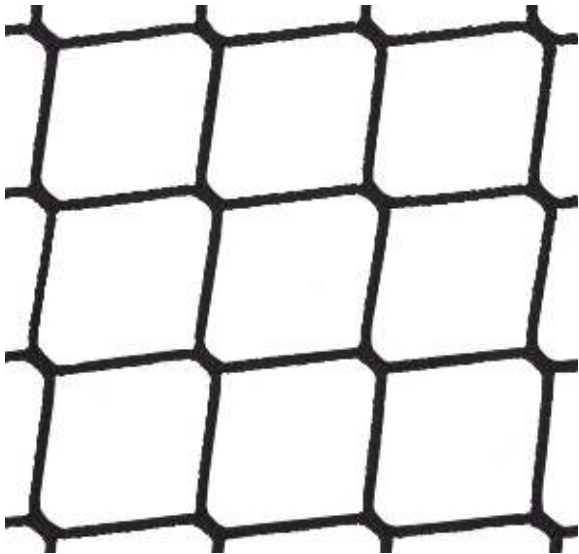

\* Mesh break refers to the strength of the individual bars of the net and does not represent the strength of the net as a whole.

\*\* ANSI A10.11 test method: 350 lb test weight dropped 3 ft into a 17x24 ft bordered net.

M500 is knotless netting with a 1-3/4 inch square mesh. Knots are eliminated using a balanced knit construction to enhance strength and durability. HTPP fiber is light weight and highly resistant to abrasion and moisture.